



MACHINE FEATURES

- Heavy-duty rugged construction designed for high durability and around-the-clock operation
- Laser cut and CNC machined components for maximum precision
- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Compact, single frame design (wrapper with integrated tunnel)
- Allen-Bradley® PanelView 600Plus operator interface with color touchscreen, message display and self-diagnostics
- Digital controls ensure fast and accurate setup of conveyor speeds, timing, and temperature settings when changing product size and film
- Bypass mode allows product to pass through the machine without being wrapped and without heating the tunnel


- Low film alert warns that a film changeover will soon be necessary
- Durable Intralox conveyor belts eliminate tracking problems
- Seal frame opening for 10" product
- Dual stage belt infeed conveyor
- 20" diameter inline film racks for easy film loading
- Simple film threading procedure
- 93" dual zone shrink tunnel
- 3-way cooling feature at the tunnel exit for immediate product handling
- NEMA 12 electrical cabinet and controls
- Central point lubrication simplifies preventive maintenance

Product Sizes	Width	Length	Height
Min.	6"	6"	2"
Max.	18"	16"	10"*

TRAY APPLICATIONS

- Cans
- Jars
- Bottles
- Trayed boxes
- Single-tier or stacked arrangement
- Unitized boxes

Specifications and product sizes may vary, depending upon the application. * Optional 16" high product - will decrease speed

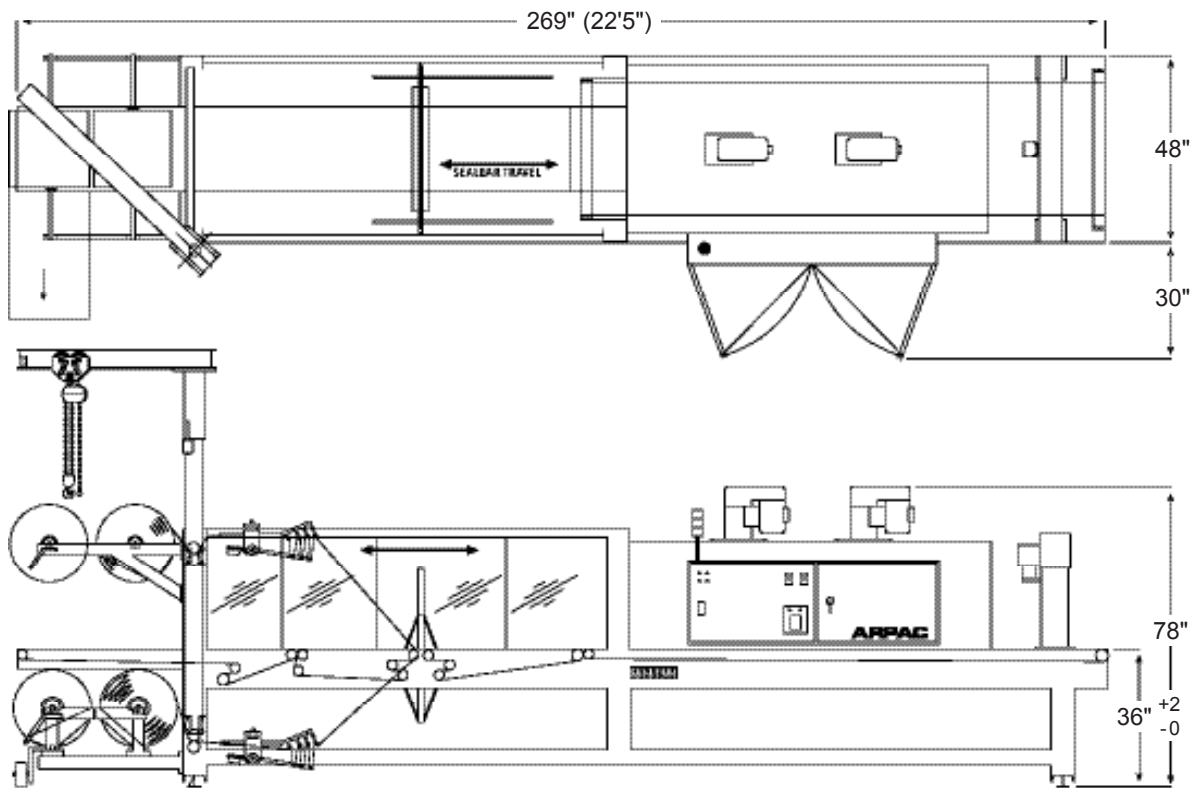

OPTIONS

- Casters for machine portability
- Quick-change seal cylinder kit for higher speeds
- Jib crane to assist with film loading
- Side mounted film rack with manual splicing bar for easy film loading at slower speeds
- Side mounted film rack with manual film splicing bar and continuous film feed for easy film loading at standard operating speeds
- 13" product opening for taller, primarily beverage products (65TW-28B)
- Print registration - top film only
- 16" high product (max speed 45 bundles per minute)
- Wider products and film widths: 65TW-32 with 30" film and 65TW-36 with 34" film
- Seal gap bridge, roller or telescoping, for product 3"-6" long

SPECIFICATIONS

Speed

- Up to 65 trays per minute

Power Requirements

Electrical

- 460VAC, 3Ph, 60Hz, 65A, 52kW

Pneumatic

- 80 psi, 40 SCFM

Product Range

- Width: 6" to 18"
- Length: 6" to 16"
- Height: 2" to 10"

Film

- Max. film width: 27" single-wound
- Clear or randomly printed
- Max. film roll diameter: 20" with a 3" core
- Max. film gauge: 4 mil.
- Film type: low density polyethylene (L.D.P.E.)



User-Friendly Operator Controls



Dual Roll Film Racks

