



Hot Plate Shrink Tunnels produce a complete and uniform shrink in most high speed wrapping applications by pulling seal lines to the bottom or sides of the package. Typical applications include pizzas, stationery, greeting cards and calendars.

In order to improve the appearance of finished packages, ARPAC Hot Plate Tunnels feature a solid heated COHRIlastic® belt designed to control the location and seal on shrink wrapped products. As the package passes over the heated area of the conveyor, heat causes the seal seams to be pulled underneath or to the sides of the product. Heavy duty variable speed blowers create a high velocity recirculating air system that ensures a contour fit and controls the location of seals by forcing hot air to all points and surfaces of the package.

These tunnels are equipped with thermocouple temperature controls, solid belt conveyors, calrod heating elements and UL listed control panels. Tunnels are available in either single or dual zones and are offered with a powder coat paint or stainless steel finish.

ARPAC Hot Plate Shrink Tunnels are manufactured in the USA in accordance with ARPAC's Lean Manufacturing Process (AM2) to ensure quality, performance and value.

Model	Standard Size Capacities		Conveyor Drive Meter	Blower Motor	Conveyor Height	Standard Machine Voltages	Element Assembly	Hot Plate Element Assembly	Approx. Shipping Weight
	Tunnel Chamber Opening W x L x H	Overall Machine Dimensions W x L x H							
HVP122260HP	22" x 60" x 12"	31" x 96" x 71 1/4"	1/2 HP	1/2 HP	36"-38"	240V/3Ph/60Hz 42A/18 kW	10.5kW	6kW	1,000 lbs
						480V/3Ph/60Hz 21A/18 kW			
HVP122290HP	22" x 90" x 12"	41" x 126" x 71 1/4"	1/2 HP	1/2 HP	36"-38"	240V/3Ph/60Hz 60A	21kW	6kW	1,250 lbs
						480V/3Ph/60Hz 35A			
HVP4/488HP	40"x60"x20"	61"x96"x83"	1 HP	1 HP	36"-38"	240V/3Ph/60Hz 52A, 22 kW	18kW	3kW-6kW	1,500 lbs
						480V/3Ph/60Hz 26A/22 kW			
HVP4/488 (used with 737C)	40"x60"x20"	61"x96"x83"	1 HP	1 HP	36"-38"	240V/3Ph/60Hz 42A/18 kW	18kW	-	1,500 lbs
						480V/3Ph/60Hz 26A/22 kW			

MACHINE FEATURES


- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Trouble-free user-friendly controls assure optimal operation
- Calrod heating elements
- Heavy-duty, high quality components and rugged construction provide continuous operation with minimal maintenance
- Variable speed conveyor ensures uniform shrink and is adjustable to meet production requirements
- Thermocouple temperature control provides precise temperature control
- Circuit breaker protected components for easy troubleshooting and minimal maintenance
- Recirculating heating system consumes less electrical energy by minimizing heat loss

APPLICATIONS

- CD's/DVD's
- Mailers
- Pizzas
- Games
- Greeting cards
- Food products
- Paper products
- Calendars

OPTIONS

- DC Variable speed blower motors
- Casters for machine portability
- Stainless steel construction

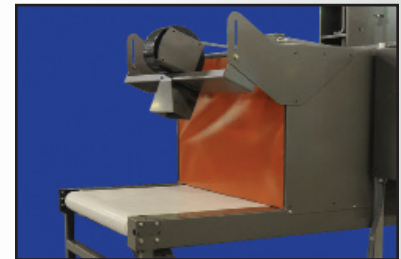

Optional Tunnel Blower



User-Friendly Operation Controls



Optional Smoothing Rollers